


# XQY-PS16-8/12-SE

## 精密高频功分/合路器

### precision RF power splitter/Combiner

参数/Parameters	规格/Specifications
频率范围 Frequency Range	8000 ~ 12000 MHz
插入损耗 Insertion Loss	≤1.6 dB (Excluding theoretical loss 未含理论损耗 12.0dB)
输入驻波 Input Port VSWR	Typ.1.28 / Max.1.4
输出驻波 Output Port VSWR	Typ.1.18 / Max.1.3
隔离度 Isolation	Typ.24dB / Min.18dB
幅度平衡 Amplitude Balance	±0.4dB
相位平衡 Phase Balance	±5°
阻抗 Impedance	50 Ohms
端口接头 Input/Output Connectors	SMA-Female
承受功率 Power Rating	Splitter 分路器用时 20W; Combiner 合路器用时 1W
工作温度 Operation Temperature	-45°C ~ +85°C
表面处理 Surface Finishing	Blue paint 蓝色烤漆
外形尺寸 Outline Dimensions	212*85*10 (mm)
重量 Weight	470 (g)

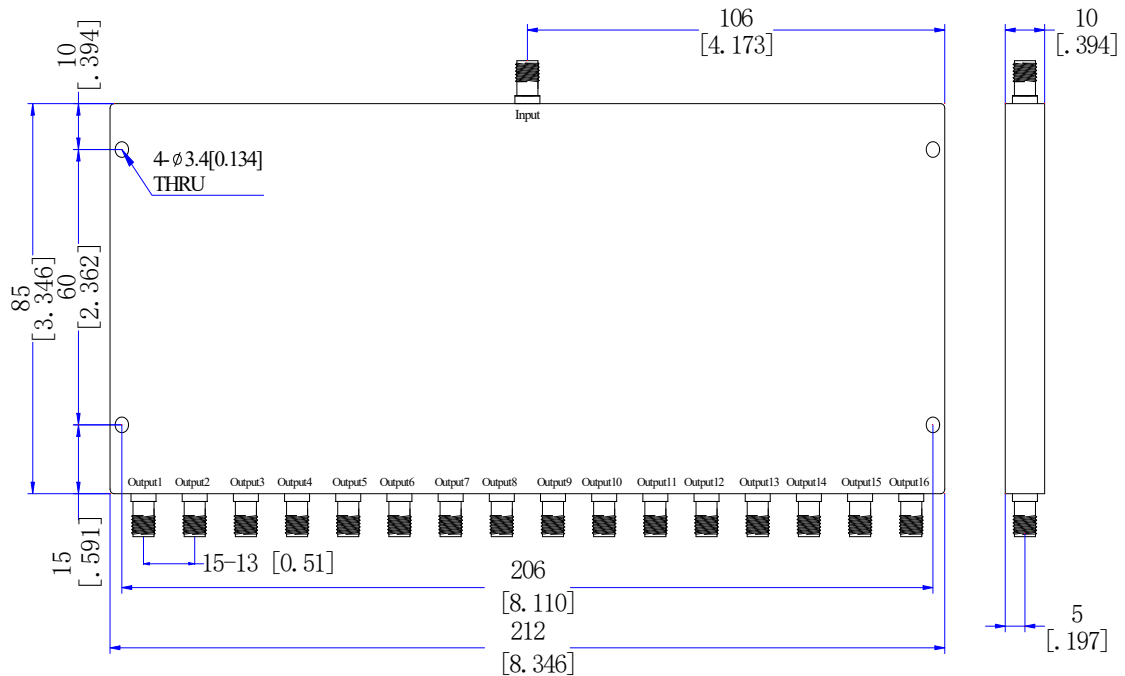

注: 尺寸(mm/[英寸]), 一般公差(± 0.3)

Note: Dimensions (mm / [inch]), General tolerance (±0.3)